


DWDM Multiplexer Dual Fiber

DWDM XXch Multiplexer


D-XX0xy-MD0-D-2160-190-LCLC-L
19"- (1 RU), 440 x 44 x 270 mm




Example: 40 channel 19" 1U/1HE DWDM Multiplexer

DWDM 40ch Multiplexer

D-40000-MD0-D-2160-190-LCLC-L
DWDM
- 40 ch
- 19" Module, 1U
- Mux/DeMux pair
- Dual Fiber
- 40 ch. ITU C21...C60 (flat top)
- Com port: LC/PC
- Ch port: LC/PC
- Mon Port: LC/PC
IL 5.0 dB, pair 10.0 dB
ISO Adjacent ≥ 25 dB, Non-adjacent ≥ 29 dB
operating temp 0...+70 °C

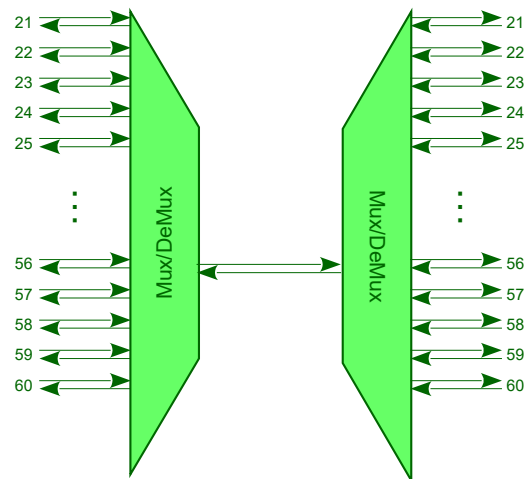


D-40001-MD0-D-2160-190-LCLC-L
DWDM
- 40 ch
- 19" Module, 1U
- Mux/DeMux pair
- Dual Fiber
- 40 ch. ITU C21...C60 (flat top)
- Monitoring (2 % on both com ports)
- Com port: LC/PC
- Ch port: LC/PC
- Mon Port: LC/PC
IL 5.0 dB, pair 10.0 dB
ISO Adjacent ≥ 25 dB, Non-adjacent ≥ 29 dB
operating temp 0...+70 °C

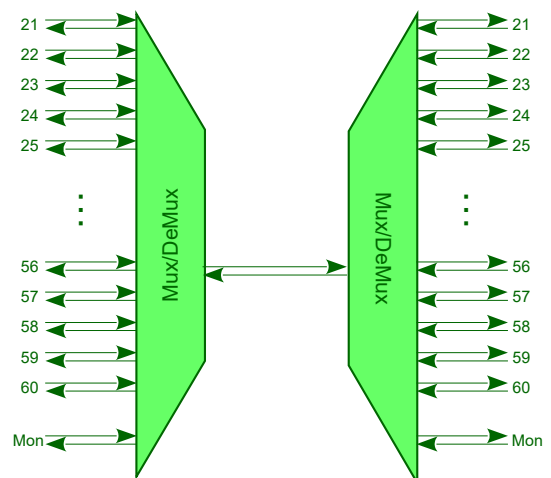


DWDM 40ch Multiplexer

D-400E1-MD0-D-2160-190-LCLC-L
DWDM
- 40 ch + Mon + Ext
- 19" Module, 1U
- Mux/DeMux pair
- Dual Fiber
- 40 ch. ITU C21...C60 (flat top)
- Extension (Filter) 1260...1458 nm
- Monitoring (2 % on both com ports)
- Com port: LC/PC
- Ch port: LC/PC
- Mon Port: LC/PC
IL 5.3 dB, pair 10.6 dB
Extension Port IL 1.3 dB, pair 2.6 dB
ISO Adjacent ≥ 25 dB, Non-adjacent ≥ 29 dB
operating temp 0...+70 °C

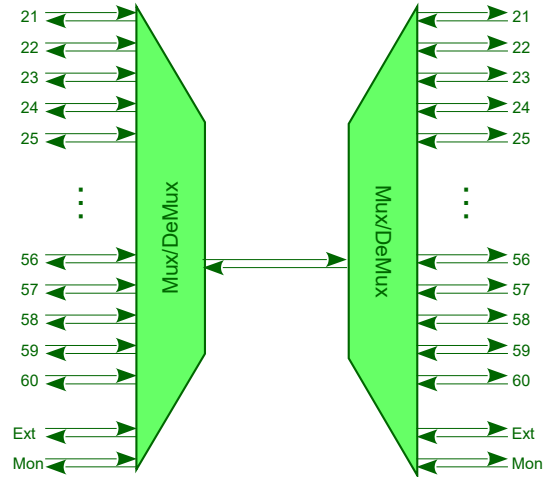

DWDM 16ch Multiplexer

D-16C00-MD0-D-2136-190-LCLC-L
DWDM
- 16 ch + Cascading
- 19" Module, 1U
- Mux/DeMux pair
- Dual Fiber
- 16 ch. ITU C21...C36
- Com port: LC/PC
- Ch port: LC/PC
- Casc port: LC/PC
IL 4.0 dB, pair 5.5 dB
ISO Adjacent ≥ 25 dB, Non-adjacent ≥ 29 dB
operating temp -10...+70 °C

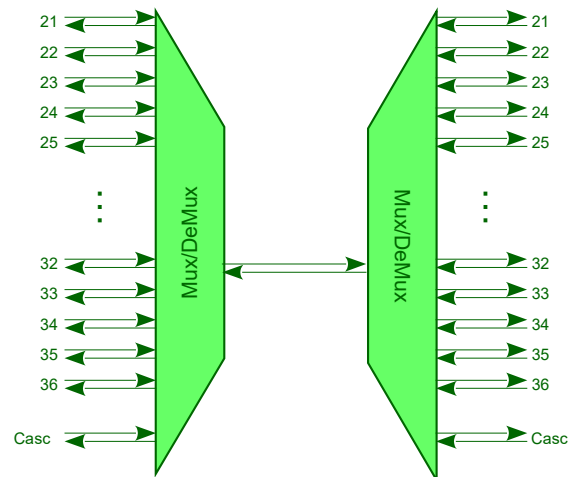

DWDM 16ch Multiplexer

D-16C01-MD0-D-2136-190-LCLC-L
DWDM
 - 16 ch + Cascading + Monitoring
 - 19" Module, 1U
 - Mux/DeMux pair
 - Dual Fiber
 - 16 ch. ITU C21...C36
 - Monitoring (2 % on both com ports)
 - Com port: LC/PC
 - Ch port: LC/PC
 - Casc port: LC/PC
 IL 4.0 dB, pair 5.5 dB
 ISO Adjacent ≥ 25 dB, Non-adjacent ≥ 29 dB
 operating temp -10...+70 °C

