


## DWDM 40ch Multiplexer Dual Fiber

### DWDM 40ch Multiplexer


D-400xy-MD0-D-2160-190-LCLC-L  
19"- (1 RU), 440 x 44 x 270 mm




40 channel 19" 1U/1HE DWDM Multiplexer

### DWDM 40ch Multiplexer

D-40000-MD0-D-2160-190-LCLC-L  
DWDM  
- 40 ch  
- 19" Module, 1U  
- Mux/DeMux pair  
- Dual Fiber  
- 40 ch. ITU C21...C60 (flat top)  
- Com port: LC/PC  
- Ch port: LC/PC  
- Mon Port: LC/PC  
IL 5.0 dB, pair 10.0 dB  
ISO Adjacent  $\geq 25$  dB, Non-adjacent  $\geq 29$  dB  
operating temp 0...+70 °C

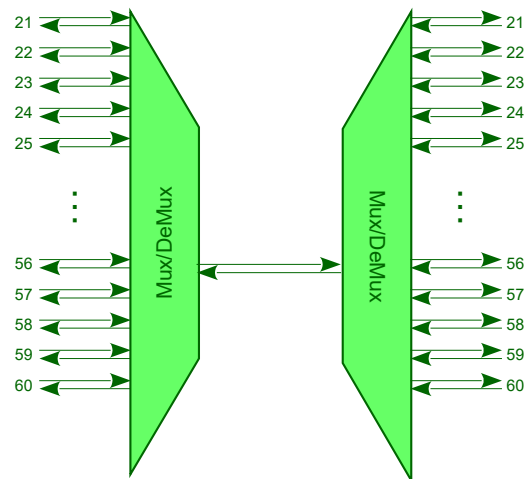

D-40001-MD0-D-2160-190-LCLC-L  
DWDM  
- 40 ch  
- 19" Module, 1U  
- Mux/DeMux pair  
- Dual Fiber  
- 40 ch. ITU C21...C60 (flat top)  
- Monitoring (2 % on both com ports)  
- Com port: LC/PC  
- Ch port: LC/PC  
- Mon Port: LC/PC  
IL 5.0 dB, pair 10.0 dB  
ISO Adjacent  $\geq 25$  dB, Non-adjacent  $\geq 29$  dB  
operating temp 0...+70 °C

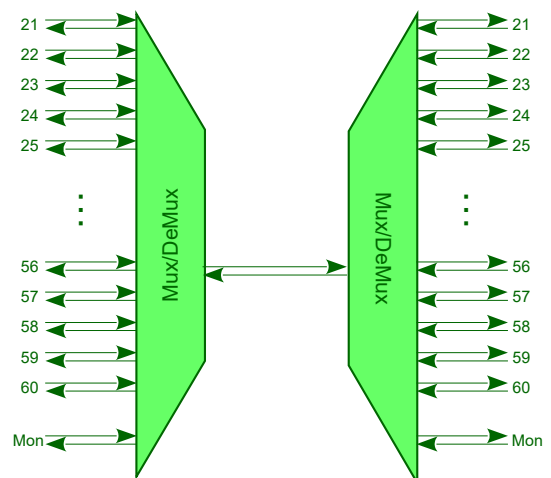

## DWDM 40ch Multiplexer

D-400E1-MD0-D-2160-190-LCLC-L  
DWDM  
- 40 ch + Mon + Ext  
- 19" Module, 1U  
- Mux/DeMux pair  
- Dual Fiber  
- 40 ch. ITU C21...C60 (flat top)  
- Extension (Filter) 1260...1458 nm  
- Monitoring (2 % on both com ports)  
- Com port: LC/PC  
- Ch port: LC/PC  
- Mon Port: LC/PC  
IL 5.3 dB, pair 10.6 dB  
Extension Port IL 1.3 dB, pair 2.6 dB  
ISO Adjacent  $\geq 25$  dB, Non-adjacent  $\geq 29$  dB  
operating temp 0...+70 °C

